

CP1000 THRU CP1008

SINGLE-PHASE SILICON BRIDGE

VOLTAGE - 50 to 800 Volts CURRENT - P.C. MTG 3A, HEAT-SINK MTG 10A

FEATURES


- Surge overload rating—200 Amperes peak
- Low forward voltage drop and reverse leakage
- Small size, simple installation
- Plastic package has Underwriter Laboratory Flammability Classification 94V-O
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA

Case: Molded plastic with heatsink integrally mounted in the bridge encapsulation

Terminals: Leads solderable per MIL-STD-202, Method 208

Weight: 0.21 ounce, 6.1 grams

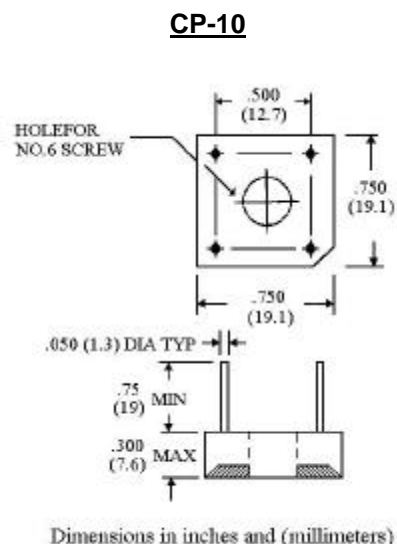

MACXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

At 25 °C ambient temperature unless otherwise noted; resistive or inductive load at 60Hz .

	CP1000	CP1001	CP1002	CP1004	CP1006	CP1008	UNITS
Max Recurrent Peak Rev Voltage	50	100	200	400	600	800	V
Max Bridge Input Voltage RMS	35	70	140	280	420	560	V
Max Average Rectified Output at $T_C=50\text{ }^\circ\text{C}^*$	10.0						A
See Fig. 2 at $T_C=100\text{ }^\circ\text{C}^*$	3.0						A
at $T_A=50\text{ }^\circ\text{C}^{**}$	3.0						
Peak One Cycle Surge Overload Current	200						A
Max Forward Voltage Drop per element at 5.0A DC & 25 °C. See Fig. 3	1.1						V
Max Rev Leakage at rated Dc Blocking Voltage per element at 25 °C	10.0						Eg A
See Fig 4 at 100 °C	1.0						mA
Typical junction capacitance per leg (Note 4) C _J	200						pF
I ² t Rating for fusing ($t < 8.3\text{ms}$)	164						A ² S
Typical Thermal Resistance (Note 2) R θ KJA	25						°C/W
Typical Thermal Resistance (Note 3) R θ KJC	5						
Operating Temperature Range	-55 TO +125						°C
Storage Temperature Range	-55 TO +150						°C

NOTES:

* Unit mounted on metal chassis.

** Unit mounted on P.C. board.

1. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
2. Units Mounted in free air, no heatsink. P.C.B at 0.375" (9.5mm) lead length with 0.5 \times 0.5" (12 \times 12mm) copper pads.
3. Units Mounted on a 3.0 \times 3.0" \times 0.11" thick (7.5 \times 7.5 \times 0.3cm) AL plate heatsink.
4. Measured at 1.0MHZ and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES

CP1000 THRU CP1008

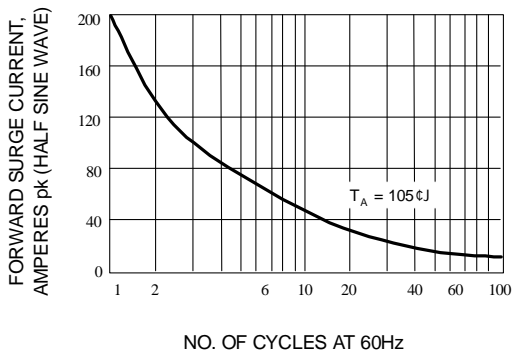


Fig. 1-NON-RECURRENT SURGE RATING

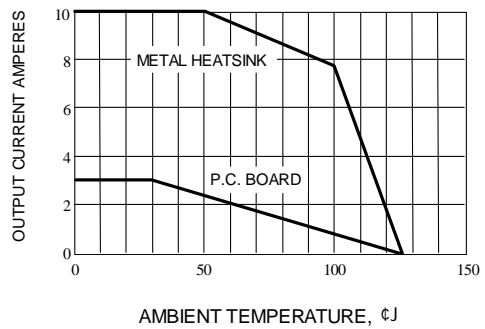


Fig. 2-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

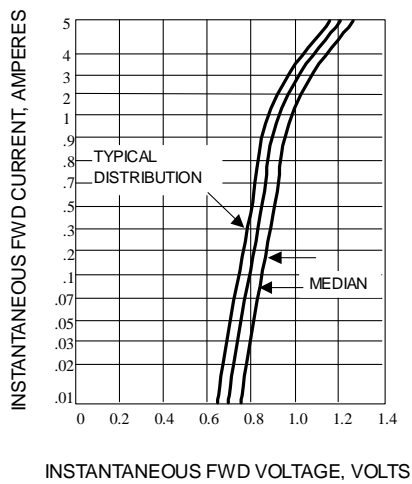


Fig. 3-TYPICAL FORWARD CHARACTERISTICS(25 °C)

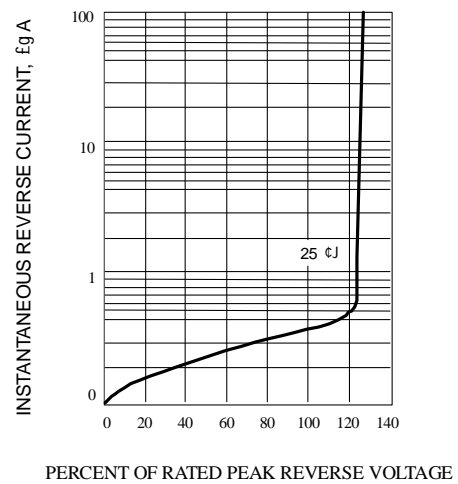


Fig. 4-REVERSE CHARACTERISTICS